


DEM-1314 DEM-1314

CC/CC REGULATED CONVERTER WITH ISOLATED OUTPUT

FEATURES

- CC/CC regulated converter with isolated output
- Box format
- Input range: 19V ~ 36V DC
- Output tension: 48V CC (adjustable by potentiometer 43V ~ 53V DC)
- Output intensity: 4,2A
- Power: 201,6W
- 1500V AC inputoutput isolation
- 86% efficiency
- Working temperature: 20C° ~ +60°C
- Dimensions (Lenght x width x height): 215 (lenght) x 115 (width) x 50 (height) mm
- This converter has a compact size, which makes it ideal for all kinds of applications
- It is designed to give an isolated and stabilized output
- It allows us to give a reliable output when we have an input from batteries or from any other equipment that can oscillate in addition to getting insulation between the input and output

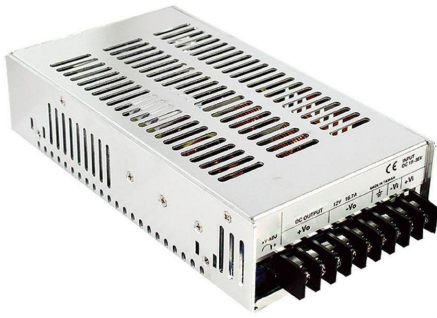

KEY FEATURES

- CC/CC regulated converter with isolated output
- Box format
- 19V ~ 36V DC input range
- 48V DC output tension
- 4,1A intensity output
- 201,6W power
- 1500V AC input-ouput isolation
- 86% efficiency